


Screwed-in helical fastener

WK-DS

collar diameter $\varnothing 28$ mm

Specifications:

- Length: 50 mm; 85 mm.
- Screwed-in helical fastener for fixing lightweight components (max. 5 kg per fastener) to polystyrene insulation walls.
- Fastened with a screw with diameter of 4.5 mm.
- Assembly using a TX-30 screwdriver bit

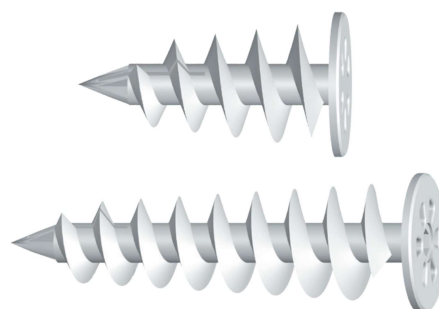

Spacer and levelling collars

DW

dimensions 40x40 mm, 2÷15 mm

Specifications:

- Spacer and levelling collars for startup profile panels.
- Colour-coded thickness of spacer collars.



Expansion plug with collar

SMNKC

dimensions $\varnothing 6$ mm or $\varnothing 8$ mm

Specifications:

- Hammer driven expansion plug with cylindrical collar for fixing startup profile thermal insulation stop beads.



Stop bead connection

LLC

dimensions 30 x 30 mm

Specifications:

Fastener for connecting insulation board startup profile panels lengthwise.

